

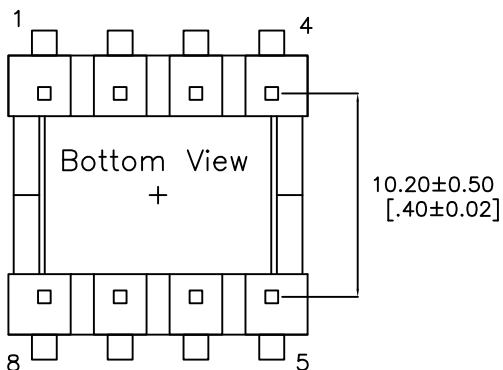
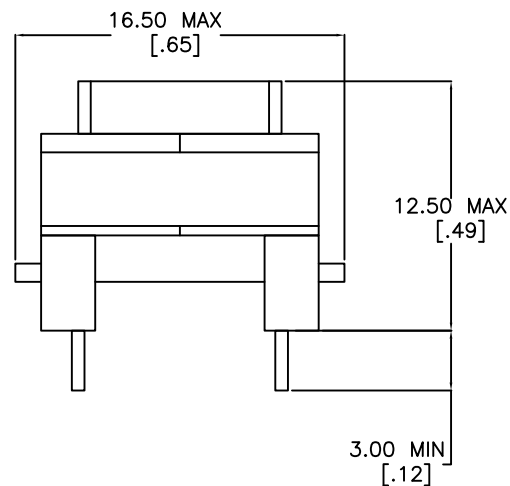
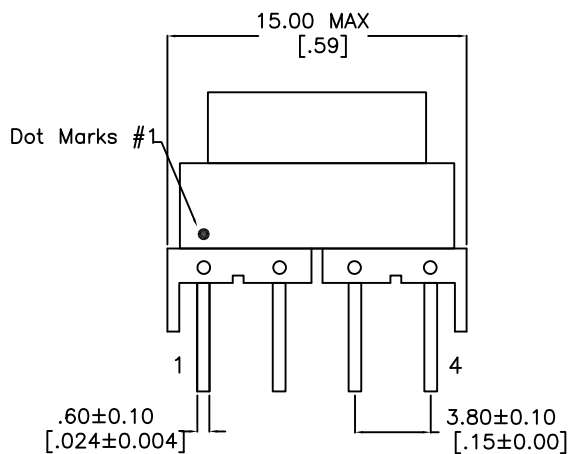




NOTES:

Turns Ratio [1-3]:[7-8]=15:1±3% [1-3]:[5-4]=12.5:1±3%

- Inductance [1-3]= 8.0mH±12% @ 10KHz/0.1V
- DCR [1-3]= 22 Ohms Nom, 27 Ohms MAX. || [4-5] = [7-8] = 0.6 Ohms Max
- Leakage Inductance [1-3] short 4,5,7,8= 110 uH MAX. @ 100KHz/0.1V
- Dielectric Withstand Voltage. 2500Vac 1,2,3,4,5 : 7,8
Dielectric Withstand Voltage. 500Vac 1,2,3 : 4,5

Temperature Rating -55C to +130C [Incl Temp Rise]

RoHS Level 6/6 Compliant

No.	DESCRIPTION		REVISIONS	DATE	APPR
THIRD ANGLE PROJECTION 	CHAMPS TECHNOLOGIES				
	CH13-1501P75W-8M-1210-TH				
TOLERANCES UNLESS OTHERWISE INDICATED	DRAWN	EL	08.05.15	PN: Transf, Bias Housekeeping	ISSUE A
.XXX 0.180 .XX 0.38 .X	CHKD	JL			REV 00
	APPR	HE		SIZE	SCALE 3:1