

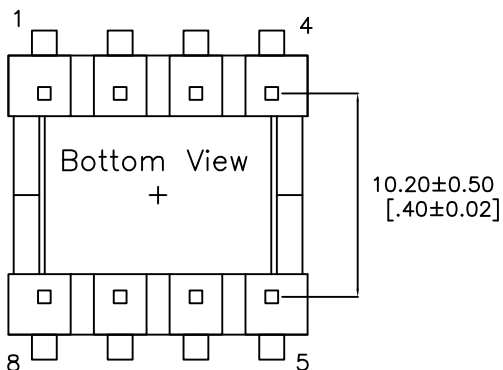
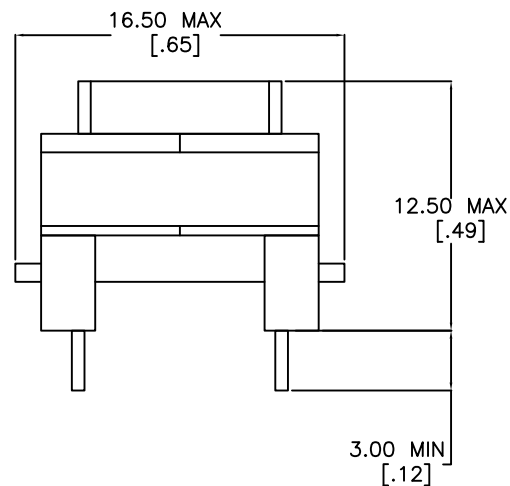
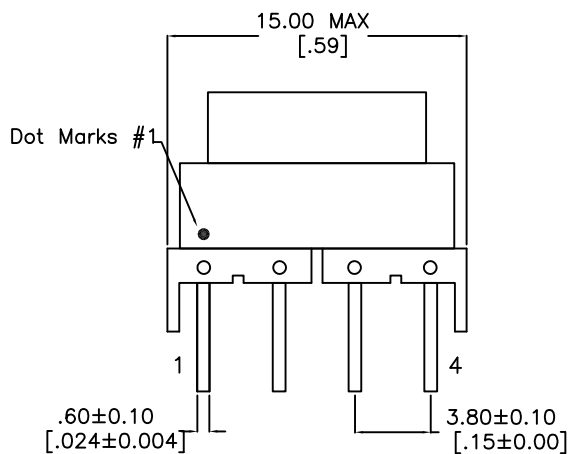




NOTES:

Turns Ratio [1-3]:[7-8]=10:1±3% [1-3]:[5-4]=8.3:1±3%

- Inductance [1-3]= 3.0mH±12% @ 10KHz/0.1V
- DCR [1-3]= 16 Ohms Nom, 19.5 Ohms MAX. || [4-5] = [7-8] = 0.8 Ohms Max
- Leakage Inductance [1-3] short 4,5,7,8= 20 uH MAX. @ 100KHz/0.1V
- Dielectric Withstand Voltage. 2500Vac 1,2,3,4,5 : 7,8
Dielectric Withstand Voltage. 500Vac 1,2,3 : 4,5

Temperature Rating -55C to +130C [Incl Temp Rise]

RoHS Level 6/6 Compliant

No.		DESCRIPTION				REVISIONS		DATE		APPR		
THIRD ANGLE PROJECTION		CHAMPS TECHNOLOGIES										
												
TOLERANCES UNLESS OTHERWISE INDICATED		DRAWN	SIGN	DATE	CH13-602P5W-3M-1210-TH							
			EL	08.05.15	PN: Transf, Bias Housekeeping						ISSUE	REV
.xxx 0.180		CHKD	JL								A	00
.xx 0.38												
.x												
		APPR	HE		SIZE		SCALE 3:1					