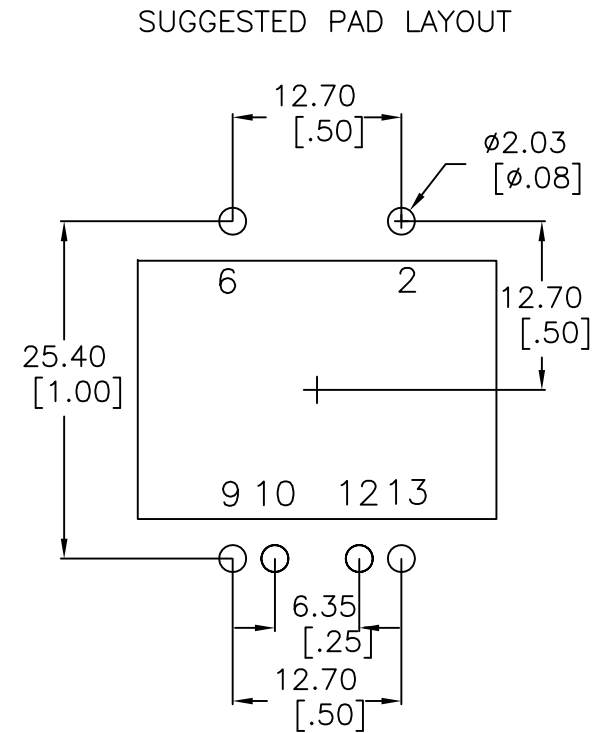
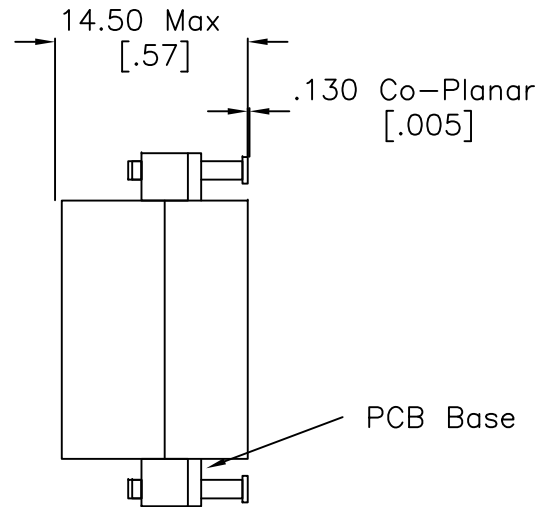
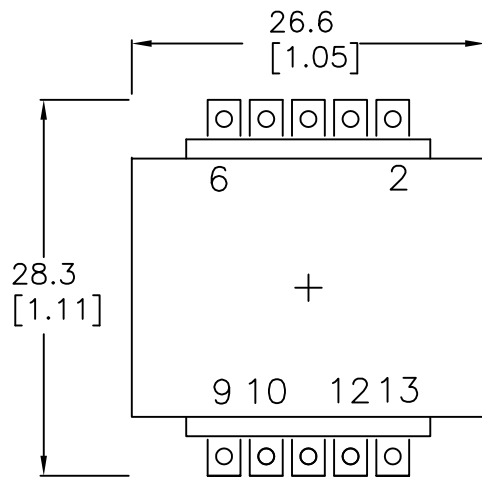


Electrical Information:

1. INDUCTANCE [2-6] = 100uH Nom, 75uH Min. @100kHz/1.0V
2. LEAKAGE INDUCTANCE [2-6] : SHORT 9,13 = 30nH Nom @100kHz
3. DCR[2-6]= 3.5 mohms Nom, 4.1 Max DCR[9,10-12,13]= 1.2 mohms Nom, 1.4 Max
4. CAPACITANCE 2,6 to 9,13 = 1000 pF Max @100kHz
5. DIELECTRIC ISOLATION :1500 VDC [2-6] : [9-13] || 500 VDC CORE :[2,6] : [9,13]
6. RoHS Level 6/6 Compliant | Halogen Free || REACH Compliant
7. Weight 31 grams Nom, 34 Max
8. Temp Rating -55C to +130C [Inclusive of temp Rise] || Materials to +170C
9. Typical Application DC2199A-A 36-72Vin To 12V 25A Forward, Active Clamp

No.	DESCRIPTION	REVISIONS	DATE	APPR
THIRD ANGLE PROJECTION				
CHAMPS TECHNOLOGIES				
TOLERANCES +/- 1.0 UNLESS OTHERWISE INDICATED		SIGN	DATE	Champs No. LTCP26-0402
.XXX ± 0.180	DRAWN	JL	09.18.15	Customer
.XX ± 0.38	CHKD	PH		Part #:
.X ± 1.5	APPR	DT		SCALE 2:1
ANGLE ±				ISSUE A REV 05