


Electrical Information:

1. TURNS RATIO [2-6] : [9-13] = 0.11 +/-2%
2. INDUCTANCE [2-6] = 8 uH ±10% @100kHz/1.0V
3. LEAKAGE INDUCTANCE [2-6] : SHORT 9,13 = 30nH Nom @100kHz
4. DCR [2,3-5,6] =0.7 mohms Nom, DCR [9-13] = 51 mohms Nom,
5. CAPACITANCE 2,6 to 9,13 = 170 pF Nom @100kHz
6. DIELECTRIC ISOLATION: [2,6] : [9,13] : Core > 2250 Vdc
DIELECTRIC ISOLATION: [2,6] : [9,13] : Core > 1500 VAC
DIELECTRIC ISOLATION: [9,13] : CORE > 500 Vdc
7. RoHS Level 6/6 Compliant | Pins 96/4 Sn/Ag Plating

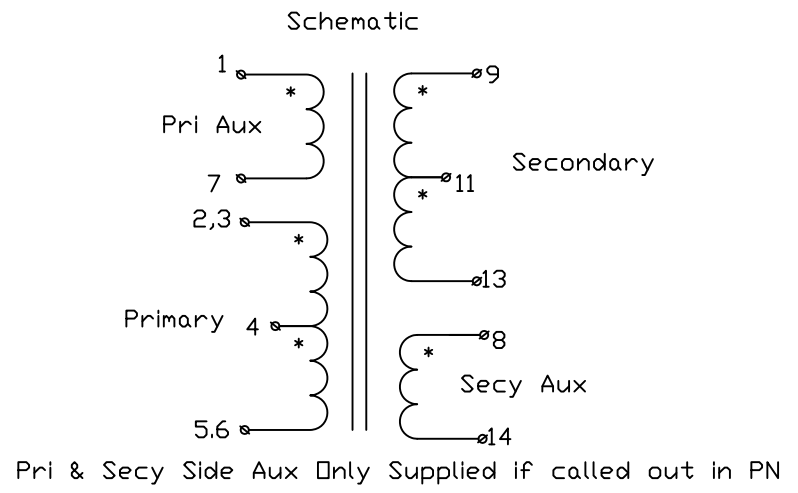

					CHAMPS TECHNOLOGIES	TOLERANCES UNLESS OTHERWISE INDICATED .xxx ± 0.180 .xx ± 0.38 .x ± 1.5	DRAWN	JL	04.09.15	TITLE: 80R6-0218-8R0		ISSUE	REV
							CHKD	PH		SIZE	SCALE	2:1	A
No.	DESCRIPTION	REVISIONS	DATE	APPR			APPR	DT					