
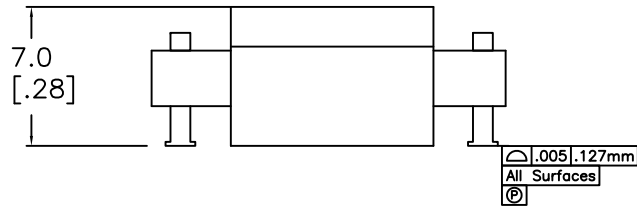



MECHANICAL DIMENSIONS [TOP VIEW]

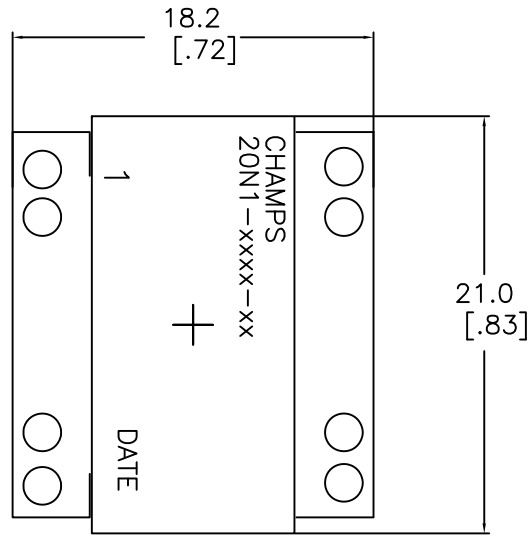


NOTES:

1. TURNS RATIO [7-9] : [2-4] = 4:1 $\pm 2\%$
TURNS RATIO [1-5] : [2-4] = xx $\pm 2\%$ || [6-10] : [2-4] = xx $\pm 2\%$
2. DCR [2-4] = 3.5 mohm Nom, [7-9] = 77 mohm Nom. [1-5] = 300 mohm Nom.
3. Inductance [2-4] = 25 μ H $\pm 10\%$, 100KHz, 1.0 VRMS @ 25C
4. Leakage Inductance [2-4] Short [7-9] = 50 nH Nom @100 KHz
5. Dielectric Strength [2-4], [1-5] to [7-9] & Core 1500 VDC Nom [Capable 2250Vdc]
[7-9], [6-10] to CORE 500 VDC
6. RoHS & REACH Compliant
7. Rated Temperature Range: -55C to +130C [Inclusive of Temp Rise]

SUGGESTED PAD LAYOUT [TOP VIEW]

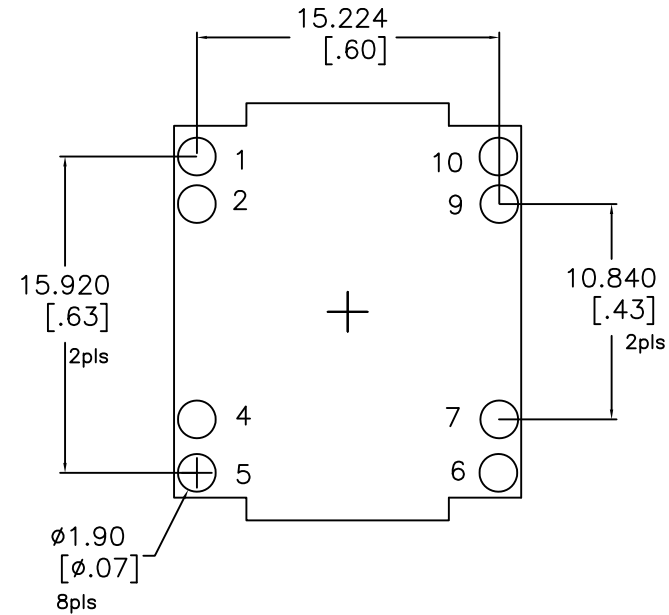

Schematic

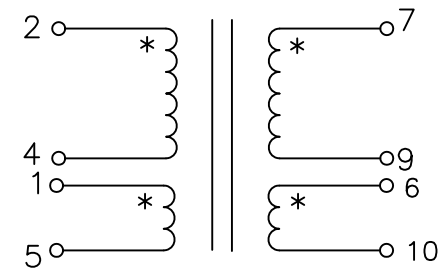

No.	DESCRIPTION	REVISIONS	DATE	APPR
THIRD ANGLE PROJECTION				
CHAMPS TECHNOLOGIES				
TOLERANCES/UNITS in MM UNLESS OTHERWISE INDICATED		SIGN	DATE	Champs-Tech PN 20N1-0312
.XXX $\pm$ 0.254	DRAWN	HE	10.24.19	Customer
.XX $\pm$ 0.508	CHKD			Part #:
.X $\pm$ 0.78	APPR			SIZE
ANGLE $\pm$				SCALE 3:1
				ISSUE A
				REV 00