

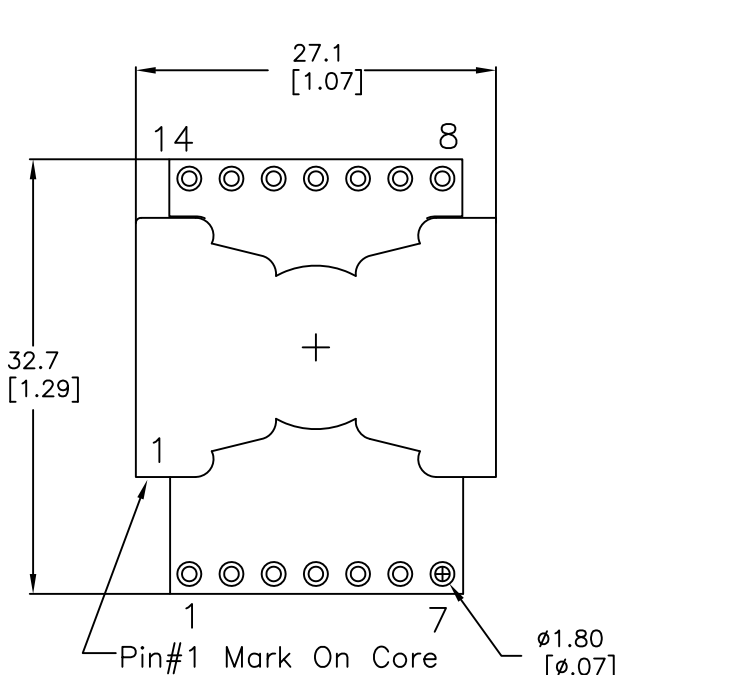


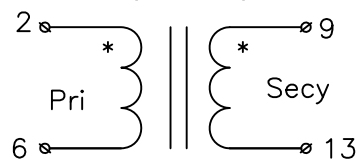

A horizontal number line with three vertical tick marks. The middle tick mark is labeled '6' and the tick mark to its right is labeled '7'.

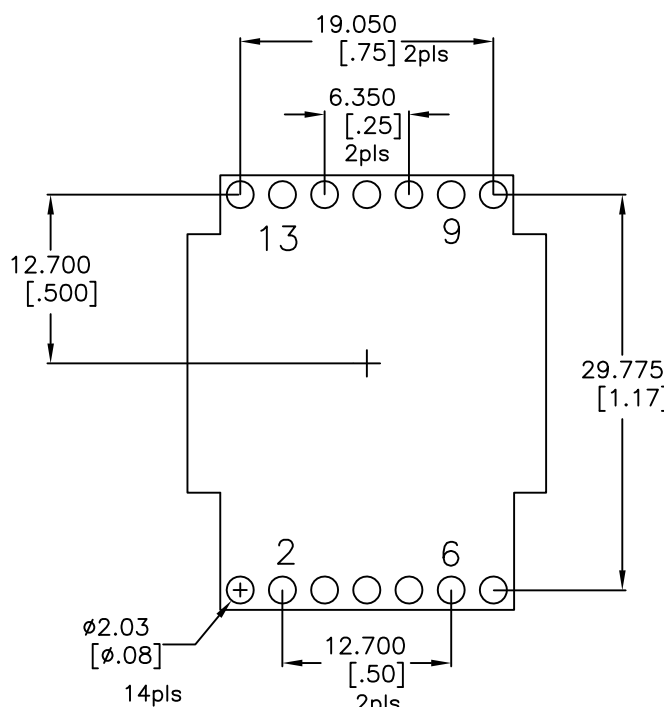

- Electrical Information:
1. TURNS RATIO [9-13] : [2-6] = $0.375 \pm 2\%$
 2. INDUCTANCE [2-6] = 200 μ H Nom $\pm 10\%$ @100kHz/1.0V
 3. LEAKAGE INDUCTANCE [2-6] : SHORT 9-13 = 50 nH Nom @100kHz
 4. DCR [2-6] = 20.8 mohms Nom, DCR [9-13] = 3.3 mohms Nom,
 5. CAPACITANCE 2,6 to 9,13 = 130 pF Nom,@100kHz
 6. DIELECTRIC ISOLATION: [2,6]: [9,13], Core > 3000 VAC/60 Sec
DIELECTRIC ISOLATION: [9,13] : CORE > 500 Vdc
 7. RoHS Level 6/6 Compliant | Pins 96/4 Sn/Ag Plating
 8. Operating Temp Range -55°C to $+130^{\circ}\text{C}$ [Inclusive of Application Temp Rise]
 9. Storage Temp Range -55°C to $+130^{\circ}\text{C}$ [Materials rated to $+170^{\circ}\text{C}$]
 10. Meets IEC-60950-1 Clearance, Creepage, Class II, Pk Working Voltage 1400V
 11. Meets IEC 61180-1 Peak Impulse Withstand Voltage 8KV Pk

No.	DESCRIPTION				REVISIONS		DATE		APPR	
THIRD ANGLE PROJECTION	CHAMPS TECHNOLOGIES									
										
TOLERANCES/UNITS IN MM UNLESS OTHERWISE INDICATED	DRAWN	SIGN	DATE	Champs-Tech PN P26R6-AC-0803-200R-TP						
.XXX ± 0.254	CHKD		04.25.19	Customer					ISSUE	REV
.XX ± 0.54				Part #:					A	00
.X ± 0.78				SIZE A4		SCALE 2:1				
ANGLE ±	APPR									