




PP 40 Series 30W-150W

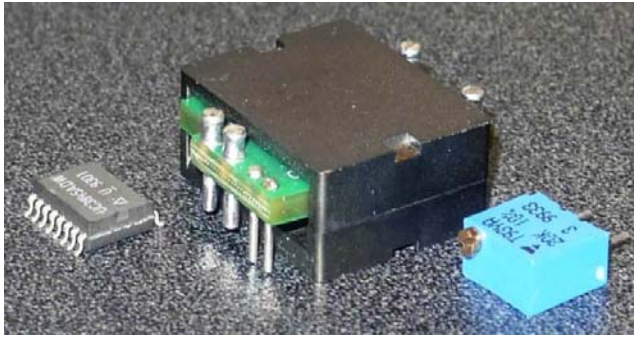

- Pulse Engineering Equivalents to PA08 Series
- Height 8.6mm to 9.7mm
- Footprint: 23.4mm x 20.1mm Max
- Frequency Range: 200 Khz to 1 Mhz
- Isolation: 1750 Vdc Basic

Electrical Specification @ 25°C - Operation Temperature -55°C to +130°C

Part Number	Turn numbers			Primary Inductance (μH max)	Leakage Inductance (μH max)	DCR (mΩ)			Sch	Max. Height (mm)
	PRI. A	PRI. B	Sec.			PRI. A	PRI. B	Sec.		
PP40.801	4T	4T	4T (1T:1T:1T:1T)	153	0.45	17.5	17.5	7.00	A1	8.6
PP40.802	4T	5T		194	0.45	17.5	20	7.00		8.6
PP40.803	5T	5T		249	0.45	20	20	7.00		8.6
PP40.804	5T	6T		290	0.50	20	25	7.00		8.6
PP40.805	6T	6T		345	0.55	25	25	7.00		8.6
PP40.806	4T	4T	1T & 1T	153	0.45	17.5	17.5	.87//.87	A2	8.6
PP40.807	4T	5T		194	0.45	17.5	20	.87//.87		8.6
PP40.808	5T	5T		249	0.45	20	20	.87//.87		8.6
PP40.809	5T	6T		290	0.50	20	25	.87//.87		8.6
PP40.810	6T	6T		345	0.55	25	25	.87//.87		8.6
PP40.811	4T	4T	2T & 1T	153	0.45	17.5	17.5	1.7//1.7	A3	8.6
PP40.812	4T	5T		194	0.45	17.5	20	1.7//1.7		8.6
PP40.813	5T	5T		249	0.45	20	20	1.7//1.7		8.6
PP40.814	5T	6T		290	0.50	20	25	1.7//1.7		9.7
PP40.815	6T	6T		345	0.55	25	25	1.7//1.7		9.7
PP40.351	8T	8T	1T & 1T	128	0.40	20		.87//.87	A4	8.6
PP40.352	8T	8T	3T	128	0.40	20		1.60		8.6

